




# Gypsum · Concave




SG-S10QT



SG-S10QT



88mm  
3.46"




### Basic Information

Model	SG-S10QT
Embedded Parts	Trimless
Mounting	Recessed
Finishing Color	White
Material	Gypsum Housing, Aluminium Light Body
Cutout Size	□123*123mm
IP Rating	IP20
Power	Max. 15W
Input Voltage	DC36V
Input Current	Max. 350mA

### Optical Parameters

Light Source	LED COB
Lumens	65lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▼ 25° ▼ 60°
Shielding Angle	39°
LED Lifespan	50000hrs

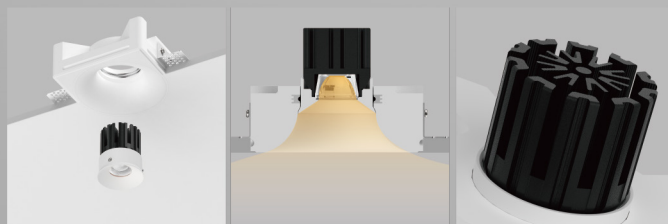

Split Design


LED COB Light Source

Cold Forged Pure Alu. Heat Sink

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

Gypsum Series

SG-S05QT

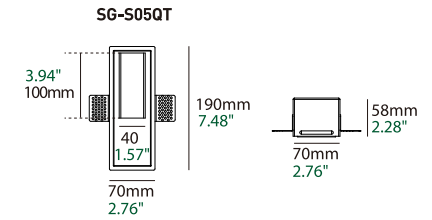

**Basic Information**

Model	SG-S05QT
Embedded Parts	Trimless
Mounting	Recessed
Finishing Color	White
Material	Gypsum Housing, Aluminium Light Body
Cutout Size	□ L193*W73*D58
IP Rating	IP20
Power	Max. 3W
Input Voltage	DC3V
Input Current	Max. 350mA

**Optical Parameters**

Light Source	LED COB
Lumens	42lm/W
CRI	95Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	▲ 50°
LED Lifespan	50000hrs

Driver Voltage	AC100-250V
Driver Options	ON/OFF


Gypsum·Square

Gypsum Series


SG-S04QT

Gypsum Series

# Gypsum·Circle



SG-S04QT



100mm  
3.94"  
150mm  
5.91"

185mm  
7.28"



55mm  
2.17"

## Basic Information

Model	SG-S04QT
Embedded Parts	Trimless
Mounting	Recessed
Finishing Color	White
Material	Gypsum Housing, Aluminium Light Body
Cutout Size	□L187*W153*D58
IP Rating	IP20
Power	Max. 3W
Input Voltage	DC3V
Input Current	Max. 350mA

## Optical Parameters

Light Source	LED COB
Lumens	42lm/W
CRI	95Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	▲ 50°
LED Lifespan	50000hrs

Driver Voltage AC100-250V

Driver Options ON/OFF