

MPR01 (Power: 10W) MPR02 (Power: 15W) MPR04 (Power: 30W)


Basic Information

Mounting	Surface mounted
Finishing Color	White
Reflector Color	White/Black/Golden
Material	Die-cast Aluminum
Light Direction	55° 355°
IP Rating	IP20
Led Voltage	DC36V

Optical Parameters

Light Source	LED COB
Lumens	70lm/W
CRI	97Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	50°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

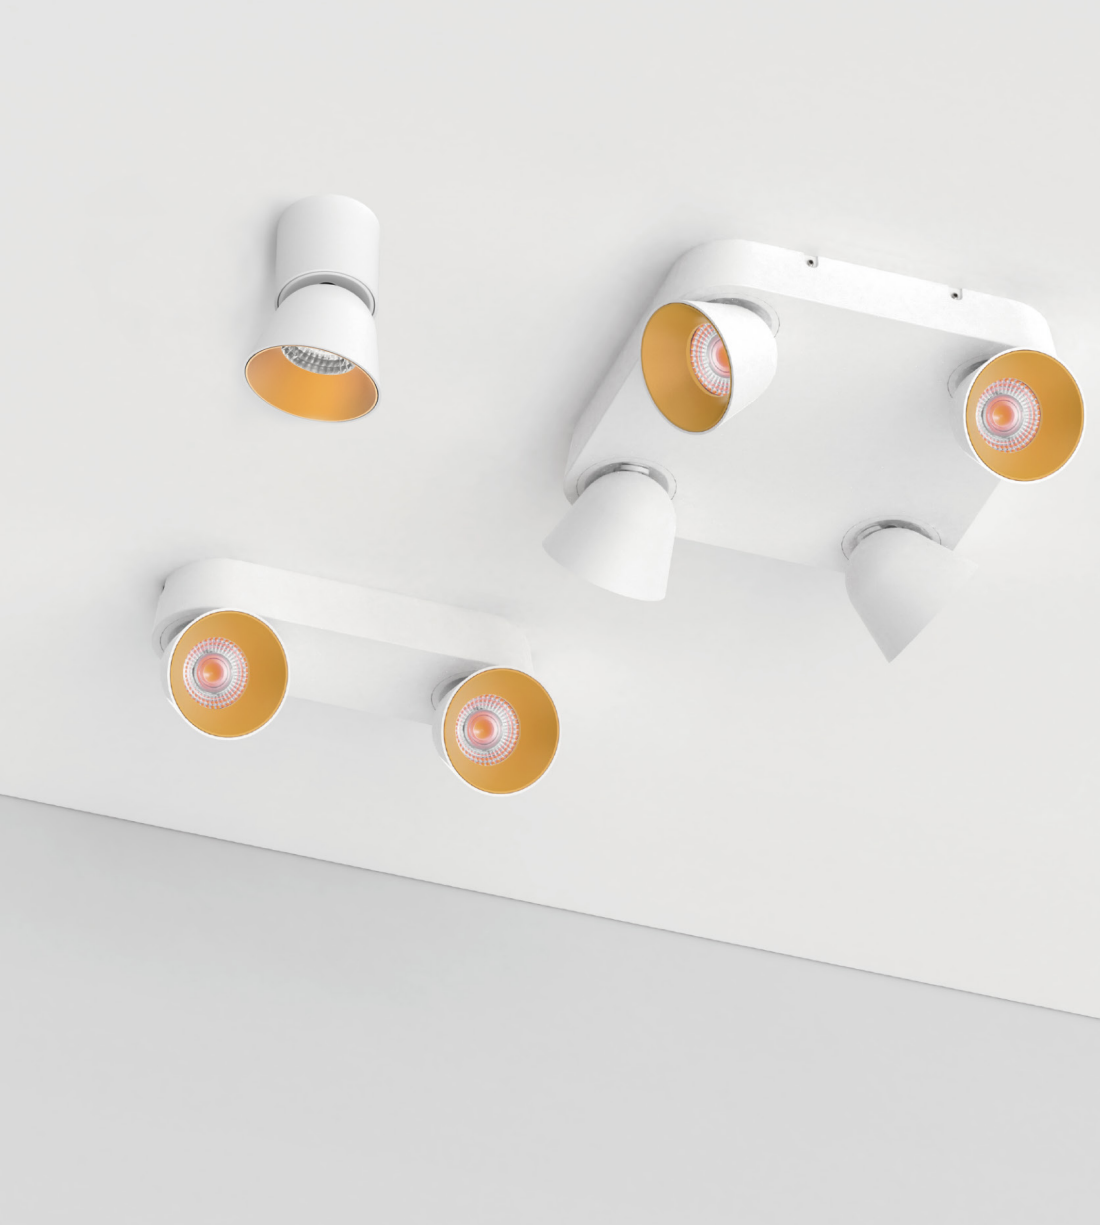

WIND CHIME




MYP02/04



Ceiling Light

AURORA

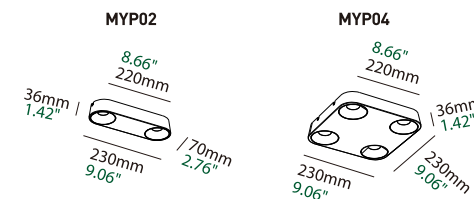

Basic Information

Model	MYP02/04
Mounting	Surface mounted
Color	White
Material	Aluminum
IP Rating	IP20
Power	Max. 12W / Max. 24W
Led Voltage	DC36V
Input Current	Max. 300mA / Max. 600mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	60°
UGR	< 16
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

MCR45



SUNSET


WT+WT

WT+GD



BK+BK

BK+GD

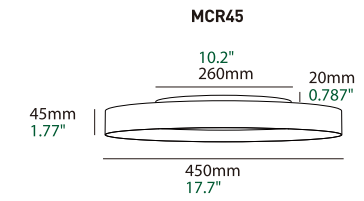

Basic Information

Model	MCR45
Mounting	Surface mounted
Finishing Color	White/Black
Inside Circle Color	White/Black/Golden
Material	Aluminum
IP Rating	IP20
Power	Max. 40W
Led Voltage	DC36V
Input Current	Max. 1000mA

Optical Parameters

Light Source	LED
Lumens	59lm/W
CRI	95Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	120°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI